



THE DISPLAY CHOICE
OF PROFESSIONALS™

AG neovo

Product Catalogue

2020

Inside This Brochure

> Engineered to Perform, Built to Last

Security & Surveillance	2
Digital Signage	2
Professional Desktop / IT	2
Video Wall	3
Meeting & Collaboration	3

> AG Neovo Innovations

NeoV™ Optical Glass	4
Anti-Burn-in™ Technology	5

> Product Specifications

Large Format	6
4K UHD	10
Security & Surveillance	14
Broadcasting	18
Healthcare	20
Interactive	22
Conference and Meeting	24
Professional Desktop / IT	26
Display Mounts & Enclosures	28

Engineered to Perform, Built to Last.

You'll find AG Neovo displays performing reliably in places where few would dare use a monitor. That's because unlike conventional desktop monitors, AG Neovo displays are created to meet the needs of demanding public and professional environments. Combining advanced technologies, innovative feature sets and a distinctive design, AG Neovo is changing how the world views displays.

Security & Surveillance

Security and surveillance operations around the world need equipment that matches the complex requirements of modern security systems, as well as stand up to the rigours of operating 24 hours a day, 7 days a week while preventing image burn-in. That is why AG Neovo provides the most comprehensive range of displays that are designed to deliver the flexibility and durability suitable for even the most stringent security environments.

Digital Signage

With more than 20 years of experience in display and video signal control solutions, AG Neovo provides digital signage solutions that are designed for 24/7 operation in all public environments. These solutions deliver a superior viewing experience and a high-level of protection with a wide variety of possible configurations perfect for retail, education, hospitality, transportation, corporations and healthcare institutions.

Professional Desktop / IT

AG Neovo offers a variety of display types, from everyday office use models with ergonomic stands and multitasking features to professional medical-grade displays that are compliant with multiple standards and safety certifications to ensure their reliable performance. Attractive, durable and versatile, AG Neovo professional desktop and IT displays are designed to meet the demands of unique environments.

Video Wall

Using multiple panels working in tandem, video walls offer businesses the ability to make an immediate impact in public spaces by creating eye-catching experiences that draw the viewer's attention at first glance. At the same time, they also give businesses the opportunity to optimise their creativity and messaging by delivering enhanced visuals beyond that which is available with single-display signage. Furthermore, from massive walls to more intimate setups, the scalability of video walls guarantee that businesses are able to create customised solutions that suit their needs.


Meeting & Collaboration

Meeting room and interactive applications demand detailed and clear image presentation; by adding multitouch capability and 4K UHD resolution, a screen becomes the centerpiece for collaborative working environments with wireless presentation connectivity for instant participation. By partnering with unique software partners for content sharing and advanced collaboration, AG Neovo's all-in-one meeting & collaboration solution, the AG Neovo Meetboard™, offers all the tools needed for presenting, collaborating and sharing ideas right out-of-the-box.

NeoV™ Optical Glass

The most advanced and trusted hard glass protection available.


NeoV™ Optical Glass is a specially formulated, hardened optical – with a proprietary multilayer coating – to enhance image quality and protect the screen from any incidental damage incurred in high-volume environments.

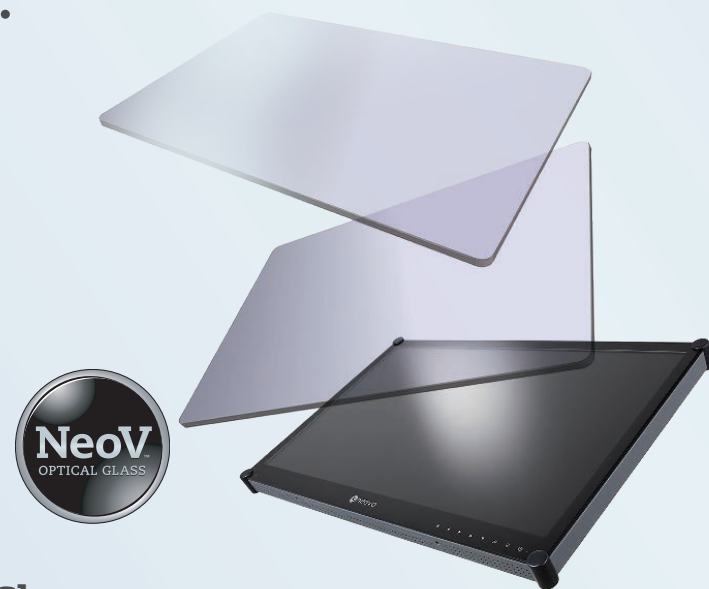

Advantages of NeoV™ Optical Glass


Anti-Scratch Surface

Provides unparalleled resistance to scratches; the coated surface of NeoV™ Optical Glass reaches 9H, the highest grade on the pencil hardness scale.

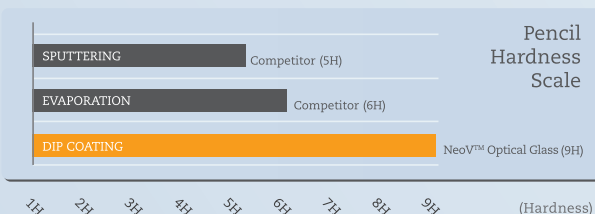

High Transmittance

Provides near perfect panel brightness with a 97.7% transmittance rate, compared to an average 91% transmittance rate for competitors' products.

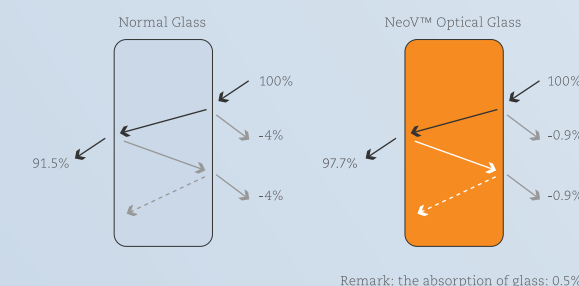

Anti-Reflection

Effectively decreases glare and reflection; results in 77.3% visual improvement over standard glass and improved viewing comfort.




High Impact Resistance

Prevent panels from physical damage caused by accidental crash; resist force up to 227g steel ball free-falling from a height of 200cm.



Water and Dust Resistance

Protect panels from dust and water; prolong displays life performance in dusty and damp environments.



Maintenance Made Easy

Easily cleaned and disinfected with water, alcohol and other common cleaning solutions due to high resistance towards abrasion, acid and alkali.



Anti-Burn-in™ Technology

Preserve image quality and prevent image retention.

AG Neovo Anti-Burn-in™ technology is designed expressly to protect your investment by preventing costly image burn-in in the display's LCD panel, a common issue in security, surveillance and other environments where static images are display long periods of time.



Advantages of Anti-Burn-in™ Technology

Prevents Image Burn-in

Eliminates the possibility of image burn-in through innovative design that can be turned ON or OFF as desired.



(w/o Anti-Burn-in™ Technology)



(w/ Anti-Burn-in™ Technology)



What is "Burn-in" effect?

"Burn-in" effect is a phenomenon where images displayed for long periods of time cause the polarisation of the liquid crystal material contained within the TFT LCD panel. Polarisation of the liquid crystal material causes the image to be 'burnt' on the display.

Continuous Surveillance

Ensures uninterrupted display of surveillance video by shifting the image imperceptibly for 15 seconds every 8 hours rather than using a screensaver function.

Uninterrupted
DISPLAY

Investment Protection

Guarantees full life operation of the display by eliminating the possibility damage caused by image burn-in.

Investment
Guaranteed

Large Format

Different industries require different formats for display selection. Some need wide-screen displays or different display sizes, while some require vertical or slim displays due to the field-site environment limits, still some industries require dual-sided displays for more commercial promotion visibility. Selecting the optimal display among the large format displays has become a crucial task for related professionals.




DF-Series



PN-Series



PD-Series



Specifications	DF-55VA	PN-55HIPS	PN-55DIPS	PN-46DVA	PD-55IPS	PD-49IPS	PD-42IPS
TFT Panel Size	54.6"	54.6"	54.6"	46.0"	54.6"	48.5"	41.9"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700/700 cd/m²	700 cd/m²	500 cd/m²	500 cd/m²	700 cd/m²	700 cd/m²	700 cd/m²
Contrast Ratio	4000:1	1400:1	1400:1	3500:1	1300:1	1300:1	1300:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	1.07B	16.7M	1.07B	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 30 kHz~92 kHz / V: 49 Hz~85 Hz	H: 31 kHz~92 kHz / V: 50 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz
Input	HDMI 1.4 x 2	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)
Output	–	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DVI-I, VGA, RS232, IR, Audio (RCA)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)
Built-in Speakers	–	10W x 2	10W x 2	10W x 2	10W x 2	10W X 2	10W x 2
Product Dimension With Base (W x H x D)	952.7 x 2030.7 x 452.4 mm (37.5" x 79.9" x 17.8")	1213.4 x 684.2 x 107.7 mm (47.8" x 26.9" x 4.2") (without base)	1213.4 x 684.2 x 107.7 mm (47.8" x 26.9" x 4.2") (without base)	1024.0 x 578.6 x 125.7 mm (40.3" x 22.8" x 4.9") (without base)	1228.6 x 699.4 x 71.1 mm (48.4" x 27.5" x 2.8") (without base)	1092.8 x 623.0 x 71.1 mm (43.0" x 24.5" x 2.8") (without base)	946.9 x 541.0 x 71.1 mm (37.3" x 21.3" x 2.8") (without base)
Product Weight	94.5 kg (207.9 lb)	24.9 kg (54.8 lb) (without base)	27.0 kg (59.5 lb) (without base)	23.0 kg (50.7 lb) (without base)	24.7 kg (54.5 lb) (without base)	19.0 kg (41.9 lb) (without base)	15.3 kg (33.7 lb) (without base)
VESA Arm/Wall Mounting	–	400 x 400 mm	400 x 400 mm	400 x 200 mm & 200 x 200 mm	400 x 400 mm	400 x 400 mm	200 x 200 mm
Glass Type	–	–	–	–	–	–	–
Features	Free Standing and Movable Floor Stand, 23.4 mm Slim Depth Design	Gamma Selection, USB Playback, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, DMR function, Alink	Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, USB Playback, Gamma Selection, DMR function, Alink	Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection	Tiling, USB Playback, Scheduling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink	Tiling, USB Playback, Scheduling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink	Tiling, USB Playback, Scheduling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink
Remarks	Optional IPC	Optional Stand	Optional Stand	Optional Stand	Optional Stand	Optional Stand	Optional Stand

PM-Series

Anti-Burn-in

USB

Gamma



Specifications	PM-65PVA	PM-48VA	PM-43VA	PM-32IPS
TFT Panel Size	64.5"	47.6"	42.5"	31.5"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	350 cd/m²	350 cd/m²	350 cd/m²	350 cd/m²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz /V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz
Input	DisplayPort, HDMI 1.4b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)
Output	DisplayPort, DVI-I, VGA, RS232, IR, Audio (3.5 mm)	RS232, IR, Audio (3.5 mm)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)
Built-in Speakers	10W x 2	10W x 2	10W x 2	10W X 2
Product Dimension With Base (W x H x D)	1459.0 x 835.0 x 82.0 mm (57.4" x 32.9" x 3.2") (without base)	1081.8 x 623.4 x 59.9 mm (42.6" x 24.5" x 2.4") (without base)	968.2 x 559.4 x 59.9 mm (38.1" x 22.0" x 2.4") (without base)	726.5 x 425.4 x 64.0 mm (28.6" x 16.7" x 2.5") (without base)
Product Weight	24.8 kg (54.7 lb) (without base)	11.5 kg (25.4 lb) (without base)	8.7 kg (19.1 lb) (without base)	5.2 kg (11.5 lb) (without base)
VESA Arm/Wall Mounting	400 x 400 mm	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 200 x 200 mm	200 x 200 mm & 100 x 100 mm
Glass Type	–	–	–	–
Features	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, Tiling, DMR Function, Alink	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function
Remarks	Optional Stand	Optional Stand	Optional Stand	Optional Stand

All specifications are subject to change without prior notice.

4K UHD

With the development of the modern technology, requirements for the high resolution displays have become much higher than before. Users keep looking for the displays that come with detailed image quality, particularly for the applications that demand high-resolution image visibility, such as commercial digital signage usage or the security and surveillance applications that require real-time and up-close monitoring of video and graphic information. Providing the reliable 4K/UHD displays has become crucial for product suppliers.



QX-Series

4K
ULTRA HD


Anti-Burn-in

METAL CASING

PIP PBP

Stick Level Alignment

24/7



Specifications	QX-55VA	QX-43VA	QX-32VA	QX-28	QX-24VA
TFT Panel Size	54.6"	42.5"	32.0"	27.9"	23.8"
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160
Brightness	450 cd/m²	500 cd/m²	350 cd/m²	300 cd/m²	300 cd/m²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	170°/160°	178°/178°
Display Colour	1.07B	16.7M	1.07B	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms	3 ms	5 ms
Frequency (H/V)	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz
Input	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)
Output	–	–	–	–	–
Built-in Speakers	10W x 2	10W x 2	10W x 2	3W x 2	3W x 2
Product Dimension With Base (W x H x D)	1271.0 x 742.0 x 87.0 mm (50.0" x 29.2" x 3.4") (without base)	1002.5 x 589.6 x 87.0 mm (39.5" x 23.2" x 3.4") (without base)	771.0 x 461.0 x 77.0 mm (30.4" x 18.1" x 2.8") (without base)	681.0 x 565.5 x 270.0 mm (26.8" x 22.3" x 10.6")	572.6 x 514.0 x 270.0 mm (22.5" x 20.2" x 10.6")
Product Weight	39.1 kg (86.2 lb) (without base)	27.1 kg (59.7 lb) (without base)	15.7 kg (34.6 lb) (without base)	13.3 kg (29.3 lb)	10.1 kg (22.3 lb)
VESA Arm/Wall Mounting	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 400 x 200 mm	200 x 200 mm & 400 x 200 mm	100 x 100 mm & 100 x 200 mm	100 x 100 mm & 100 x 200 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor, Landscape/Portrait Orientation	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor, Landscape/Portrait Orientation	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor	Blue-light Filter, Landscape/Portrait Orientation, EcoSmart Sensor, Flicker Free	Blue-light Filter, Landscape/Portrait Orientation, EcoSmart Sensor, Flicker Free
Remarks	–	–	–	–	–

All specifications are subject to change without prior notice.

QM-Series

4K

ULTRA HD

Anti-Burn-in

CMS

USB

Gamma

OPS




Specifications	QM-86A IPS	QM-75A IPS	QM-65A VA	QM-55A VA	QM-43A VA
TFT Panel Size	85.6"	74.5"	64.5"	54.6"	42.5"
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160
Brightness	410 cd/m²	410 cd/m²	350 cd/m²	350 cd/m²	350 cd/m²
Contrast Ratio	1200:1	1200:1	4000:1	4000:1	5000:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	176°/176°
Display Colour	1.07B	1.07B	1.07B	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz
Input	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	HDMI 2.0 x 2, DV1, VGA, RS232, RJ45, IR, USB 2.0, USB 3.0, Audio (3.5 mm)	HDMI 2.0 x 2, DV1, VGA, RS232, RJ45, IR, USB 2.0, USB 3.0, Audio (3.5 mm)
Output	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)
OS	Android 5.0.1	Android 5.0.1	Android 5.0.1	Android 5.0.1	Android 5.0.1
CPU	1 Ghz Quad Core Full HD	1 Ghz Quad Core Full HD	1 Ghz Quad Core Full HD	1 Ghz Quad Core Full HD	1 Ghz Quad Core Full HD
Memory	2 GB DDR3	2 GB DDR3	2 GB DDR3	2 GB DDR3	2 GB DDR3
Storage	8 GB eMMC	8 GB eMMC	8 GB eMMC	8 GB eMMC	8 GB eMMC
Built-in Speakers	10W x 2	10W x 2	10W x 2	10W x 2	10W x 2
Product Dimension With Base (W x H x D)	1927.9 x 1098.9 x 85.9 mm (75.9" x 43.3" x 3.4") (without base)	1676.6 x 955.0 x 73.8 mm (66.0" x 37.6" x 2.9") (without base)	1458.7 x 834.7 x 81.6 mm (54.7" x 32.9" x 3.2") (without base)	1239.2 x 711.6 x 61.7 mm (48.8" x 28.1" x 2.4") (without base)	968.2 x 559.4 x 59.9 mm (38.1" x 22.0" x 2.4") (without base)
Product Weight	63.8 kg (140.7 lb) (without base)	53.0 kg (116.8 lb) (without base)	24.8 kg (54.7 lb) (without base)	16.0 kg (35.3 lb) (without base)	8.7 kg (19.2 lb) (without base)
VESA Arm/Wall Mounting	400 x 600 mm	400 x 600 mm	400 x 400 mm	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 200 x 200 mm
Glass Type	–	–	–	–	–
Features	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, HeatControl Sensor, Alink	Gamma Selection, USB Playback, HeatControl Sensor, Alink
Remarks	–	–	Optional Stand	Optional Stand	Optional Stand

Security & Surveillance

As technology advances and a greater number of surveillance options become available, many security professionals are looking to reap the benefits from new display technology. While factors such as objectives, location, scale, and budget often dictate the type of display solutions adopted, qualities such as reliability, efficiency, and longevity remain mainstays in purchasing decisions for organisations.



RX-Series



Specifications	RX-42E IPS	RX-32E VA	RX-24E VA	RX-22E VA	SC-42AH VA	SC-32AH VA
TFT Panel Size	41.9"	31.5"	23.6"	21.5"	42.0"	31.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700 cd/m²	500 cd/m²	250 cd/m²	250 cd/m²	400 cd/m²	300 cd/m²
Contrast Ratio	1300:1	3000:1	20,000,000:1 (DCR)	20,000,000:1 (DCR)	3000:1	3000:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 31 kHz-83 kHz / V: 50 Hz-75 Hz	H: 31 kHz-83 kHz / V: 50 Hz-75 Hz
Input	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)
Output	DisplayPort 1.2, DVI, Composite (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort 1.2, DVI, Composite (BNC), RS232, IR, Audio (3.5 mm)	Composite (BNC), Audio (RCA)	Composite (BNC), Audio (RCA)	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)
Built-in Speakers	10W x 2	10W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	987.2 x 581.2 x 83.0 mm (38.9" x 22.9" x 3.3") (without base)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0") (without base)	562.0 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1")	513.0 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	992.3 x 656.3 x 240.0 mm (39.1" x 25.8" x 9.5")	744.0 x 523.7 x 199.2 mm (29.3" x 20.6" x 7.8")
Product Weight	23.1 kg (50.9 lb) (without base)	15.0 kg (33.1 lb) (without base)	7.9 kg (17.4 lb)	6.8 kg (15.0 lb)	14.5 kg (31.9 lb)	8.7 kg (19.2 lb)
VESA Arm/Wall Mounting	200 x 200 mm	400 x 200 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	400 x 400 mm	200 x 100 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	-	-
Features	Gamma Selection, OPS Slot, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor	Gamma Selection, Scheduling, Tiling, Landscape/Portrait Orientation, EcoSmart Sensor	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Front-sided IP22	Anti-Burn-in	Anti-Burn-in
Remarks	Optional Stand	Optional Stand	Available in black and white, Optional Stand	Available in black and white, Optional Stand	-	-

SC-Series



SC-Series



Specifications	SC-24AH	SC-22AH	SC-19AH IPS	SC-17AH	SX-19E	SX-17E	SX-15E VA
TFT Panel Size	24.0"	21.5"	18.9"	17.0"	19.0"	17.0"	15.0"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	SXGA 1280 x 1024	SXGA 1280 x 1024	SXGA 1280 x 1024	XGA 1024 x 768
Brightness	250 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²	300 cd/m²
Contrast Ratio	1000:1	1000:1	1000:1	1000:1	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	170°/160°	170°/160°	170°/160°	170°/160°	170°/160°	176°/176°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.2 M
Response Time	3 ms	3 ms	5 ms	3 ms	3 ms	3 ms	5 ms
Frequency (H/V)	H: 31 kHz~83 kHz / V: 50 Hz~75 Hz	H: 31 kHz~83 kHz / V: 50 Hz~75 Hz	H: 31 kHz~83 kHz / V: 50 Hz~75 Hz	H: 31 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~81 kHz / V: 50 Hz~75 Hz	H: 24 kHz~81 kHz / V: 50 Hz~75 Hz	H: 24 kHz~81 kHz / V: 50 Hz~75 Hz
Input	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), S-Video, Audio (3.5mm)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)
Output	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)
Built-in Speakers	1W x 2	1W x 2	1W x 2	1W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	577.0 x 407.4 x 224.0 mm (22.7" x 16.0" x 8.8")	516.6 x 376.1 x 185.0 mm (20.3" x 14.8" x 7.3")	418.4 x 411.8 x 184.0 mm (16.5" x 16.2" x 7.9")	371.9 x 385.2 x 184.0 mm (14.6" x 15.2" x 7.2")	445.4 x 420.2 x 175.0 mm (17.5" x 16.5" x 6.9")	409.4 x 398.2 x 175.0 mm (16.1" x 15.7" x 6.9")	380.0 x 359.0 x 155.0 mm (15.0" x 14.1" x 6.1")
Product Weight	3.6 kg (7.9 lb)	3.4 kg (7.6 lb)	3.6 kg (7.9 lb)	2.9 kg (6.4 lb)	7.0 kg (15.4 lb)	6.1 kg (13.4 lb)	4.7 kg (10.4 lb)
VESA Arm/Wall Mounting	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm
Glass Type	–	–	–	–	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	Anti-Burn-in	Anti-Burn-in	Anti-Burn-in	Anti-Burn-in	Gamma Selection, EcoSmart Sensor, Front-sided IP22	Gamma Selection, EcoSmart Sensor, Front-sided IP22	Gamma Selection, EcoSmart Sensor, Front-sided IP22, Flicker Free
Remarks	–	–	–	–	–	–	–

SC-Series



Specifications	SC-55E VA	SC-42E VA	SC-32E IPS	SC-27E VA	SC-24E IPS	SC-22E	SC-19E
TFT Panel Size	55.0"	42.5"	31.5"	27.0"	23.8"	21.5"	18.5"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	1366 x 768
Brightness	350 cd/m²	300 cd/m²	300 cd/m²	300 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	170°/160°	170°/160°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms	3 ms	3 ms
Frequency (H/V)	H: 31 kHz~85 kHz / V: 48 Hz~75 Hz	H: 31 kHz~85 kHz / V: 48 Hz~75 Hz	H: 31 kHz~85 kHz / V: 48 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz
Input	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5mm)
Output	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC), Audio (3.5mm)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)
Built-in Speakers	3W x 2	3W x 2	3W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	1240.0 x 717.0 x 83.0 mm (48.8" x 28.2" x 3.3")	967.0 x 638.7 x 236.8 mm (38.1" x 25.1" x 9.3")	728.8 x 540.3 x 236.8 mm (28.7" x 21.3" x 9.3")	611.9 x 454.7 x 238.7 mm (24.1" x 17.9" x 9.4")	540.6 x 396.1 x 194.0 mm (21.3" x 15.6" x 7.6")	505.2 x 380.8 x 194.0 mm (19.9" x 15.0" x 7.6")	441.9 x 356.2 x 194.0 mm (17.4" x 14.0" x 7.6")
Product Weight	13.8 kg (30.4 lb)	10.8 kg (23.8 lb)	8.7 kg (19.2 lb)	5.3 kg (11.7 lb)	3.8 kg (8.2 lb)	2.8 kg (6.2 lb)	2.3 kg (5.1 lb)
VESA Arm/Wall Mounting	400 x 200 mm	400 x 200 mm & 100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Glass Type	–	–	–	–	–	–	–
Features	Anti-Burn-in	Anti-Burn-in	Anti-Burn-in	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection , Black-level Adjustment, Flicker Free, Alink
Remarks	–	–	–	–	–	–	–

All specifications are subject to change without prior notice.

Broadcasting

Broadcast environments combine multiple live feeds to produce programming, monitor and control television broadcasts. Constant monitoring of real-time content in this demanding environment makes reliability critical to ensure system long-life and uptime. AG Neovo professional displays are designed and built for non-stop 24/7 operation. The hard-wrought metal casing industrial designs, meticulously selected components coupled with the robust protection of NeoV™ Optical Glass and Anti-Burn-in™ proprietary technologies set AG Neovo displays apart in environments where downtime is not an option.



HX-Series

Anti-Burn-in

NeoV

HD-SDI

Eco Smart

Gamma

24/7



Specifications	HX-42E 	HX-32E 	HX-24E 
TFT Panel Size	41.9"	31.5"	23.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700 cd/m²	500 cd/m²	250 cd/m²
Contrast Ratio	1300:1	3000:1	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°
Display Colour	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz
Input	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite/3G-SDI (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite/3G-SDI (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio(3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC), RS232, USB 2.0, Audio (3.5 mm/RCA)
Output	DisplayPort, DVI, Composite/3G-SDI (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort, DVI, Composite/3G-SDI (BNC), RS232, IR, Audio (3.5 mm)	Composite (BNC), 3G-SDI (BNC), Audio (RCA)
Built-in Speakers	10W x 2	10W x 2	2W x 2
Product Dimension With Base (W x H x D)	987.2 x 581.2 x 83.0 mm (38.9" x 22.9" x 3.3") (without base)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0") (without base)	562.4 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1") (without base)
Product Weight	23.2 kg (51.1 lb) (without base)	15.2 kg (33.5 lb) (without base)	7.9 kg (17.4 lb) (without base)
VESA Arm/Wall Mounting	200 x 200 mm	400 x 200 mm	100 x 100 mm & 75 x 75 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor, Alink	SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor, Alink	Gamma Selection, SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, EcoSmart Sensor, Auto Detect Video Signal,Front-sided IP22
Remarks	Optional Stand	Optional Stand	-

All specifications are subject to change without prior notice.

Healthcare

The displays used in medical scenarios usually require flexibility and easy field-site installation. Besides, these displays need to be EN/IEC 60601-1-certified, ensuring a safety medical environment for both patients and clinical professionals. Meanwhile, image clarity is also a crucial factor for bringing the detailed images and visual presentations for medical survey and accurate diagnosis. Suppliers need to use the advanced technology and provide the reliable displays for increasing medical accuracy and efficiency.





	MX-Series		DR-Series		MD-Series	
Specifications	MX-24	MX-22	DR-22E	DR-17E	MD-27	MD-24
TFT Panel Size	23.5"	21.5"	21.5"	17.0"	27.0"	23.8"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	300 cd/m²	250 cd/m²	250 cd/m²	250 cd/m²	300 cd/m²	250 cd/m²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°	170°/160°	178°/178°	170°/160°	178°/178°	178°/178°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	3 ms	3 ms	5 ms	3 ms	5 ms	5 ms
Frequency (H/V)	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~83 kHz / V: 50 Hz~75 Hz	H: 24 kHz~81 kHz / V: 50 kHz~75 kHz	H: 30 kHz~85 kHz / V: 45 Hz~76 Hz	H: 30 kHz~85 kHz / V: 45 Hz~76 Hz
Input	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Composite x 2 (BNC), S-Video, USB 2.0, RS232, Audio (3.5 mm / RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite x 2 (BNC), S-Video, USB 2.0, RS232, Audio (3.5 mm / RCA)	HDMI 1.4, VGA, Audio (3.5 mm)	HDMI 1.4, VGA, Audio (3.5 mm)
Output	-	-	Composite x 2 (BNC), Audio (RCA)	Composite x 2 (BNC), Audio (RCA)	-	-
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	562.4 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1")	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	409.4 x 398.2 x 175.0 mm (16.1" x 15.7" x 6.9")	611.9 x 518.7 x 249.0 mm (24.1" x 20.4" x 9.8")	540.6 x 498.6 x 249.0 mm (21.3" x 19.6" x 9.8")
Product Weight	7.8 (17.2 lb)	6.7 kg (14.7 lb)	6.8 kg (15.0 lb)	6.1 kg (13.4 lb)	6.6 kg (14.5 lb)	5.7 kg (12.5 lb)
VESA Arm/Wall Mounting	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm	100 x 100 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	-	-
Features	DICOM Part 14, Gamma Selection, EcoSmart Sensor, Front-sided IP22	DICOM Part 14, Gamma Selection, EcoSmart Sensor, Front-sided IP22	Illuminator Mode, DC 24V Power Supply, Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Equipotential Terminal, Front-sided IP22	Illuminator Mode, DC 24V Power Supply, Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Equipotential Terminal, Front-sided IP22	Ergonomically-designed Stand; EN60601-1, IEC60601-1, Landscape/Portrait Orientation	Ergonomically-designed Stand; EN60601-1, IEC60601-1, Landscape/Portrait Orientation
Remarks	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-01)	-	-

Interactive

Touch panels and displays have recently become a main industry where it requires a direct and interactive contact between users and the displays. It needs highly sensitive and reliable panel for the media to perform the command, and requires advanced technology knowledge to provide the reliability product to increase communication performance and efficiency.



TX-Series



Specifications	TX-42PVA
TFT Panel Size	42.0"
Max. Resolution	FHD 1920 x 1080
Brightness	500 cd/m ²
Contrast Ratio	4000:1
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency (H/V)	H: 30 kHz~80 kHz / V: 56 Hz~76 Hz
Input	HDMI 1.4, DVI, VGA, RS232, Audio (3.5 mm)
Output	Audio (3.5 mm)
Built-in Speakers	10W x 2
Product Dimension With Base (W x H x D)	978.5 x 578.2 x 82.1 mm (38.5" x 22.8" x 3.2") (without base)
Product Weight	24.5 kg (54.0 lb) (without base)
VESA Arm/Wall Mounting	400 x 400 mm
Glass Type	Tempered Glass
Features	Projected Capacitive Touch Technology, EcoSmart Sensor, Scheduling, Landscape/Portrait Orientation
Remarks	10-point touch for Windows 10, Android (Kernel 3.8+), Linux (Kernel 3.8+) by plug & play, Mac10.7~Mac10.13 by UPDD Driver (UPDD_06_00_376)

Specifications	TX-32PVA
TFT Panel Size	31.5"
Max. Resolution	FHD 1920 x 1080
Brightness	500 cd/m ²
Contrast Ratio	3000:1
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency (H/V)	H: 30 kHz~80 kHz / V: 50 Hz~76 Hz
Input	HDMI 1.4, DVI, VGA, RS232, Audio (3.5 mm)
Output	Audio (3.5 mm)
Built-in Speakers	10W x 2
Product Dimension With Base (W x H x D)	750.2 x 466.8 x 69.6 mm (29.5" x 18.4" x 2.7") (without base)
Product Weight	12.5 kg (27.6 lb) (without base)
VESA Arm/Wall Mounting	400 x 200 mm
Glass Type	Tempered Glass
Features	Projected Capacitive Touch Technology, EcoSmart Sensor, Scheduling, Landscape/Portrait Orientation
Remarks	10-point touch for Windows 10, Android (Kernel 3.8+), Linux (Kernel 3.8+) by plug & play, Mac10.7~Mac10.13 by UPDD Driver (UPDD_06_00_376)

TM-Series



Specifications	TM-23IPS
TFT Panel Size	23.0"
Max. Resolution	FHD 1920 x 1080
Brightness	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency (H/V)	H: 30 kHz~83 kHz / V: 50 Hz~76 Hz
Input	DisplayPort, HDMI 1.3, VGA, USB HUB (3.0 x 4), Audio (3.5 mm)
Output	–
Built-in Speakers	2W x 2
Product Dimension With Base (W x H x D)	561.0 x 400.0 x 238.5 mm (22.1" x 15.7" x 9.4")
Product Weight	6.6 kg (14.6 lb)
VESA Arm/Wall Mounting	100 x 100 mm
Glass Type	Tempered Glass
Features	Projected Capacitive Touch Technology, Dual-hinge Stand
Remarks	10-point touch for Windows 10 by plug & play

Specifications	TM-22
TFT Panel Size	21.5"
Max. Resolution	FHD 1920 x 1080
Brightness	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°
Display Colour	16.7M
Response Time	3 ms
Frequency (H/V)	H: 30 kHz~83 kHz / V: 50 Hz~76 Hz
Input	DisplayPort, HDMI 1.3, VGA, USB HUB (3.0 x 4), Audio (3.5 mm)
Output	–
Built-in Speakers	2W x 2
Product Dimension With Base (W x H x D)	522.4 x 387.4 x 238.5 mm (20.6" x 15.3" x 9.4")
Product Weight	6.3 kg (13.9 lb)
VESA Arm/Wall Mounting	100 x 100 mm
Glass Type	Tempered Glass
Features	Projected Capacitive Touch Technology, Dual-hinge Stand
Remarks	10-point touch for Windows 10 by plug & play

Conference and Meeting

The AG Neovo Meetboard™ 4K UHD Interactive Displays are designed for meeting rooms and interactive applications that require detailed and clear image presentation. With its embedded interactive whiteboard and media streaming software, the Meetboard™ delivers out-of-the-box collaboration and sharing capabilities for modern meeting rooms and boardrooms. Its versatile connectivity options including HDMI, VGA, USB, RS232, and RJ45 provide a complete computing solution for annotation and media playback without the need for a PC.



IFP-Series

4K
ULTRA HD

NeoV
OPTICAL GLASS

20
POINTS



Specifications	IFP-8602
TFT Panel Size	85.6"
Max. Resolution	UHD 3840 x 2160
Brightness	350 cd/m²
Contrast Ratio	1200:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07B
Response Time	5 ms
Frequency (H/V)	H: 30 kHz–80 kHz / V: 50 Hz–76 Hz
Input	HDMI 2.0 x 3, VGA, RS232, RJ45, USB 2.0 x 3, USB 3.0 x 3, Audio (3.5mm)
Output	HDMI 2.0, Audio (3.5mm), S/PDIF
OS	Android 8.0
CPU	Dual core A73+Dual core A53
Memory	3GB DDR3
Storage	16GB Standard
Built-in Speakers	16W x 2
Product Dimension With Base (W x H x D)	1957.2 x 1160.0 x 86.0 mm (77.1" x 45.6" x 3.4") (without base)
Product Weight	66.0 kg (145.5 lb) (without base)
VESA Arm/Wall Mounting	800 x 600 mm
Glass Type	Anti-Glare Glass
Features	Whiteboard and annotation software, WPS Office Suite App, Content wireless sharing, Infrared Touch Frame Technology
Remarks	20-point touch for Windows 7/8/10, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) by plug & play, macOS by UPDD driver




IFP-7502
74.5"
UHD 3840 x 2160
350 cd/m²
1100:1
178°/178°
1.07B
5 ms
H: 30 kHz–80 kHz / V: 50 Hz–76 Hz
HDMI 2.0 x 3, VGA, RS232, RJ45, USB 2.0 x 3, USB 3.0 x 3, Audio (3.5mm)
HDMI 2.0, Audio (3.5mm), S/PDIF
Android 8.0
Dual core A73+Dual core A53
3GB DDR3
16GB Standard
16W x 2
1710.0 x 1020.0 x 86.0 mm (67.3" x 40.2" x 3.4") (without base)
50.6 kg (111.6 lb) (without base)
800 x 400 mm
Anti-Glare Glass
Whiteboard and annotation software, WPS Office Suite App, Content wireless sharing, Infrared Touch Frame Technology
20-point touch for Windows 7/8/10, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) by plug & play, macOS by UPDD driver



IFP-6502
64.5"
UHD 3840 x 2160
350 cd/m²
1200:1
178°/178°
1.07B
5 ms
H: 30 kHz–80 kHz / V: 50 Hz–76 Hz
HDMI 2.0 x 3, VGA, RS232, RJ45, USB 2.0 x 3, USB 3.0 x 3, Audio (3.5mm)
HDMI 2.0, Audio (3.5mm), S/PDIF
Android 8.0
Dual core A73+Dual core A53
3GB DDR3
16GB Standard
16W x 2
1489.0 x 897.0 x 86.0 mm (58.6" x 35.3" x 3.4") (without base)
39.0 kg (86.0 lb) (without base)
600 x 400 mm
Anti-Glare Glass
Whiteboard and annotation software, WPS Office Suite App, Content wireless sharing, Infrared Touch Frame Technology
20-point touch for Windows 7/8/10, Android/Linux (kernel version 3.5+), Chrome OS (39 or above) by plug & play, macOS by UPDD driver

Professional Desktop / IT

Desktop displays play an essential part in various modern industries. All visual presentations require a desktop display for different applications: Software developers need computers and desktop displays for programming, compiling, and operation, and office workers find desktop displays necessary for their daily work. Selecting a reliable desktop displays have become so basic and crucial for efficiency and convenience.

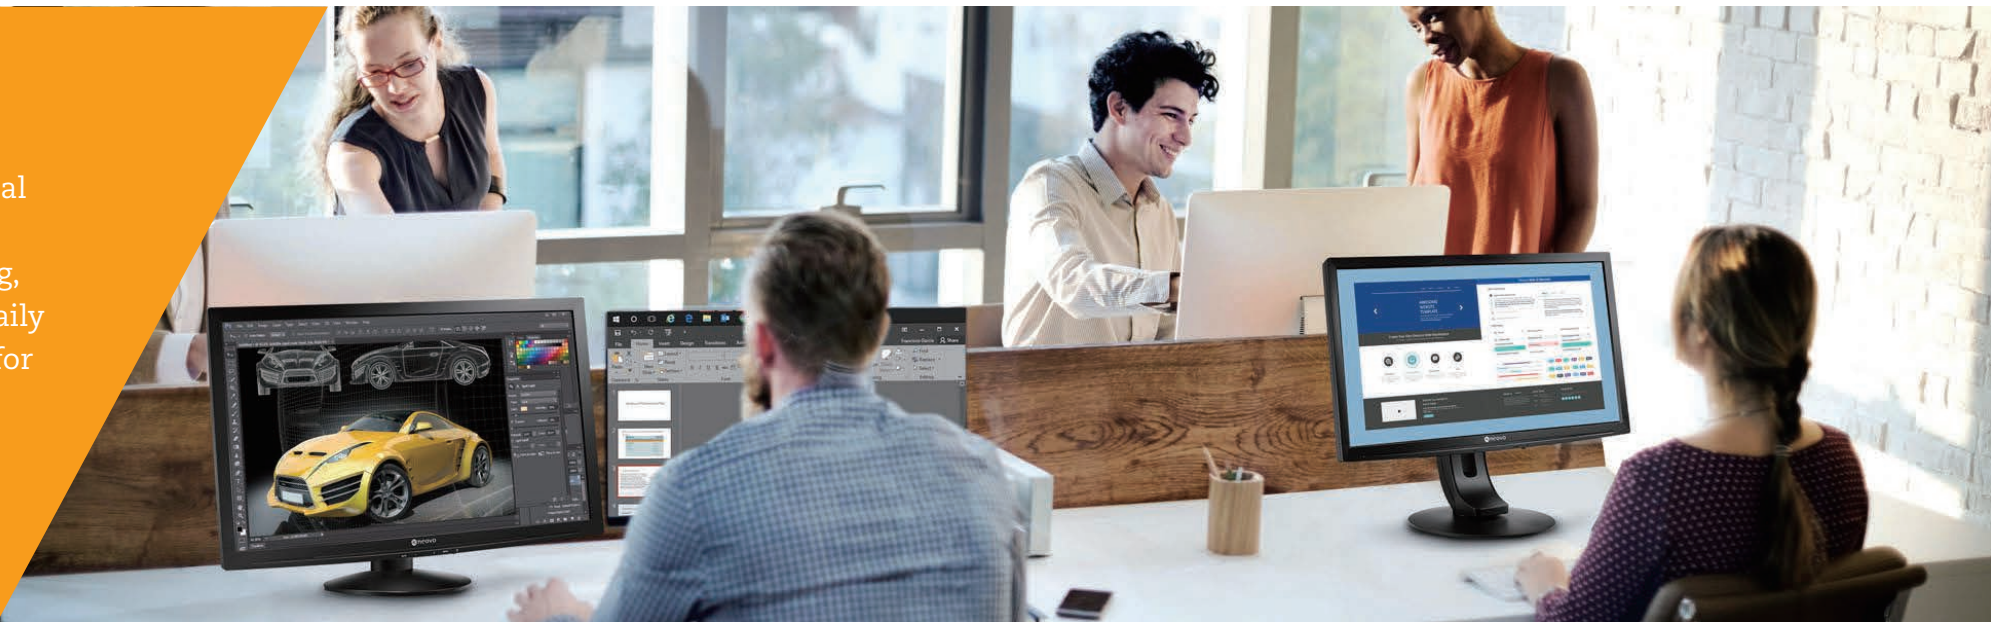

LA-Series

Wide Viewing Angle

DisplayPort

DisplayPort

DisplayPort




Specifications	LA-24 
TFT Panel Size	23.8"
Max. Resolution	FHD 1920 x 1080
Brightness	270 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency (H/V)	30 kHz-83 KHz / 56 Hz-75 Hz
Input	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)
Output	Audio (3.5 mm)
Built-in Speakers	2W x 2
Product Dimension With Base (W x H x D)	550.0 x 433.0 x 226.0 mm (21.7" x 17.0" x 8.9")
Product Weight	3.5 kg (7.7 lb)
VESA Arm/Wall Mounting	100 x 100 mm
Glass Type	-
Features	Blue-light Filter, Flicker Free
Remarks	-



LA-22
21.5"
FHD 1920 x 1080
250 cd/m ²
20,000,000:1 (DCR)
170°/160°
16.7M
3 ms
30 kHz-83 KHz / 56 Hz-75 Hz
DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)
Audio (3.5 mm)
2W x 2
511.0 x 377.0 x 183.0 mm (20.1" x 14.8" x 7.2")
3.4 kg (7.5 lb)
100 x 100 mm
-
Blue-light Filter, Flicker Free
-

Display Mounts & Enclosures

Installation methods and display accessories play an important role for display deployments in the application locations. Suppliers need to offer various mounting devices so that users can easily find the suitable solutions that meet their requirements. All related accessories are also needed to be available to increase user’s application efficiency and performance.

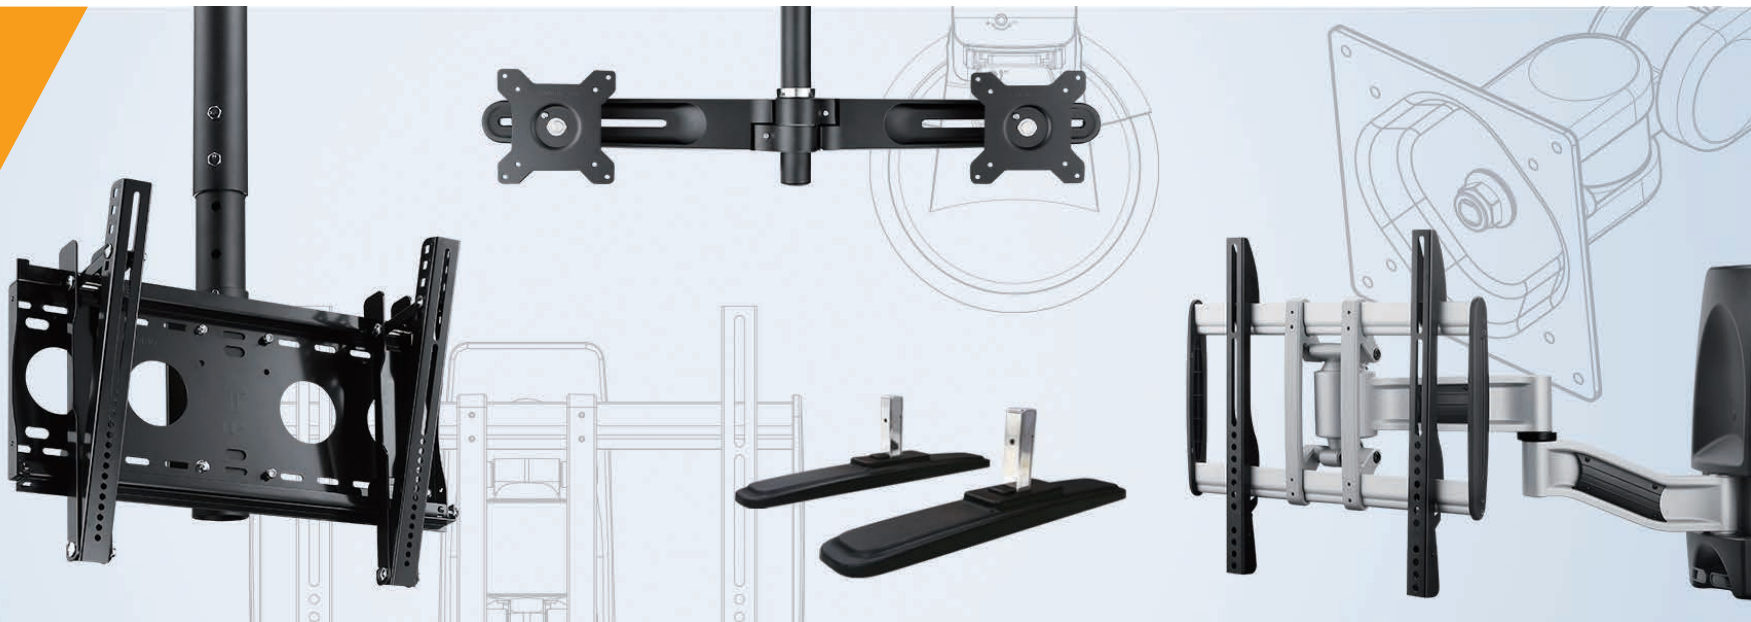

Ceiling Mounts



		CMP-01+ LMK-01	CMP-01+LMK-02	CMP-01+WMK-03
Mounting	VESA Standard	Max. 725.0 x 450.0 mm	Max. 440 x 330 mm	100 x 100 mm / 200 x 100 mm / 200 x 200 mm
Loading	Weight Capacity	60.0 kg (132.3 lb) Per side	60.0 kg (132.3 lb) Per side	60.0 kg (132.3 lb) Per side
Adjustment	Swivel	360°	360°	360°
	Height	924.0–1424.0 mm (36.4”–56.1”)	924.0–1424.0 mm (36.4”–56.1”)	924.0–1424.0 mm (36.4”–56.1”)
Exterior	Material	Steel	Steel	Steel
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	788.0 x 1,424.0 x 401.0 mm (31.0” x 56.1” x 15.7”)	508.0 x 1,424.0 x 338.0 mm (20.0” x 56.1” x 13.3”)	248.0 x 1,424.0 x 216.0 mm (9.8” x 56.1” x 8.6”)
	Packing (W x H x D)	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4” x 10.6” x 9.0”) LMK-01 Box : 836.0 x 245.0 x 54.0 mm (32.9” x 9.7” x 2.1”)	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4”x10.6”x9.0”) LMK-02 Box : 556.0 x 245.0 x 54.0 mm (21.9” x 9.6” x 2.1”)	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4” x 10.6” x 9.0”) WMK-03 Box : 244.0 x 267.0 x 54.0 mm (9.6” x 10.5” x 2.1”)
Weight	Net Weight	11.9 kg (24.9 lb)	10.6 kg (23.4 lb)	9.0 kg (19.8 lb)
	Gross Weight	13.7kg (30.2 lb)	12.1 kg (26.8 lb)	10.1 kg (22.3lb)


Desk Mounts



		DMC-01	DMC-02D
Mounting	VESA Standard	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	10.0 kg (22.0 lb)	12.0 kg (26.5 lb) per hinge
Adjustment (Mounting Bracket)	Rotation	360°	360° (Default: 90°)
	Swivel	-90° to 90°	-20° to 20° per hinge
	Tilt	-20° to 90°	-20° to 20° per hinge
Adjustment (Arm)	Lift	315.0 mm of Increment (-30° - 65°)	–
	Swivel	360°	–
Exterior	Material	Steel, Aluminium alloy, Plastic	Steel, Aluminium alloy, Plastic
	Colour	Black & Silver	Black
Dimensions	Net (W x H x D)	620.0 x 656.0 x 158.0 mm (24.4” x 25.8” x 6.2”)	672.0 x 470.0 x 144.0 mm (26.5” x 18.5” x 5.7”)
	Packing (W x H x D)	463.0 x 143.0 x 218.0 mm (18.2” x 5.6” x 8.6”)	602.0 x 143.0 x 218.0 mm (23.7” x 5.6” x 8.6”)
Weight	Net Weight	3.0 kg (6.6 lb)	3.8 kg (8.3 lb)
	Gross Weight	3.9 kg (8.6 lb)	4.0 kg (8.9 lb)

Floor Mounts

		FMC-02
Mounting	Display	32” -65” Displays
	VESA Standard	Max. 400 x 400 mm
Loading	Weight Capacity	30.0 kg (66.1 lb)
Adjustment	Tilt	–
	Lift (Max. centre display)	1826.0 mm (71.9”) (max. centre display)
Exterior	Material	Steel and Aluminium
	Colour	Dark grey and Silver
Dimensions	Net (W x H x D)	973.0 x 1896.0 x 641.0 mm (38.3” x 74.6” x 25.2”)
	Packing (W x H x D)	680.0 x 1,860.0 x 180.0 mm (26.8” x 73.2” x 7.1”)
Weight	Net Weight	21.5 kg (47.4 lb)
	Gross Weight	25.0 kg (55.1 lb)



		ES-02
Mounting	VESA Standard	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	2.0–8.0 kg (4.4–17.6 lb)
Adjustment	Rotation	90° (Landscape/Portrait)
	Swivel	360°
	Tilt	-5° to 25°
	Lift	–
	Material	Plastic
Exterior	Material	Plastic
	Colour	Black
Dimensions	Net (W x H x D)	222.0 x 432.0 x 252.0 mm (8.7” x 17.0” x 9.9”)
	Packing (W x H x D)	260.0 x 95.0 x 460.0 mm (10.2” x 3.7” x 18.1”)
Weight	Net Weight	3.1 kg (6.8 lb)
	Gross Weight	3.6 kg (7.9 lb)



All specifications are subject to change without prior notice.

Wall Mounts



		LMA-01	WMA-01
Mounting	VESA Standard	Max. 400 x 400 mm	75 x 75 mm / 100 x 100 mm / 200 x 100 mm / 200 x 200 mm
Loading	Weight Capacity	35.0 kg (77.2 lb)	25.0 kg (55.1 lb)
Adjustment	Swivel	-90° to 90°	-90° to 90°
	Tilt	-15° to 15°	-15° to 15°
Extension	Max. Distance to Wall	562.0 mm (22.1")	469.0 mm (18.5")
	Min. Distance to Wall	105.0 mm (4.1")	70.0 mm (2.8")
Exterior	Material	Steel, Aluminium alloy, Plastic	Steel, Aluminium alloy, Plastic
	Colour	Black & Silver	Black & Silver
Dimensions	Net (W x H x D)	500.0 x 450.0 x 105.0 mm (19.7" x 17.7" x 4.1")	345.0 x 285.0 x 469.0 mm (13.6" x 11.2" x 18.5")
	Packing (W x H x D)	624.0 x 124.0 x 460.0 mm (24.6" x 4.9" x 18.1")	347.0 x 98.0 x 327.0 mm (13.7" x 3.9" x 12.9")
Weight	Net Weight	7.8 kg (17.2 lb)	3.1 kg (6.9 lb)
	Gross Weight	9.3 kg (20.4 lb)	3.9 kg (8.5 lb)



		WMK-03	WMK-01	PMK-01
Mounting	VESA Standard	100 x 100 mm / 200 x 100 mm / 200 x 200 mm	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	60.0 kg (132.3 lb)	18.0 kg (40.0 lb)	14.0 kg (30.9 lb)
Adjustment	Rotation	–	–	270°
	Swivel	–	–	-90° to 90°
	Tilt	-15° to 0°	–	-90° to 90°
Exterior	Material	Steel	Steel	Steel and die-cast aluminium
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	248.0 x 230.0 x 45.0 mm (9.8" x 9.1" x 1.8")	130.0 x 140.0 x 20.0 mm (5.1" x 5.5" x 0.8")	115.0 x 115.0 x 131.0 mm (4.5" x 4.5" x 5.2")
	Packing (W x H x D)	244.0 x 55.0 x 267.0 mm (9.6" x 2.1" x 10.5")	135.0 x 175.0 x 27.0 mm (5.3" x 6.9" x 1.1")	120.0 x 120.0 x 145.0 mm (4.8" x 4.8" x 5.7")
Weight	Net Weight	2.2 kg (4.9 lb)	0.36 kg (0.79 lb)	1.5 kg (3.3 lb)
	Gross Weight	2.3 kg (5.1 lb)	0.42 kg (0.93 lb)	1.6 kg (3.5 lb)



		LMK-01	LMK-02	LMK-03
Mounting	VESA Standard	Max. 725 x 450 mm	Max. 440 x 330 mm	Max. 800 x 500 mm
Loading	Weight Capacity	80.0 kg (176.4 lb)	80.0 kg (176.4 lb)	100.0 kg (220 lb)
	Tilt	-15° to 0°	-15° to 0°	-15° to 15°
Exterior	Material	Steel	Steel	Steel
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	788.0 x 490.0 x 48.0 mm (31.0" x 19.3" x 1.9")	508.0 x 368.0 x 48.0 mm (20.0" x 14.5" x 1.9")	840.0 x 574.0 x 75.0 mm (33.1" x 22.6" x 3.0")
	Packing (W x H x D)	836.0 x 245.0 x 54.0 mm (32.9" x 9.6" x 2.1")	556.0 x 245.0 x 54.0 mm (21.9" x 9.7" x 2.1")	854.0 x 289.0 x 274.0 mm (33.6" x 11.4" x 10.8")
Weight	Net Weight	5.1 kg (11.2 lb)	3.8 kg (8.3 lb)	4.4 kg (9.6 lb)
	Gross Weight	5.9 kg (13.0 lb)	4.4 kg (9.6 lb)	5.1 kg(11.3 lb)

All specifications are subject to change without prior notice.

Stands



		STD-02A	STD-03A	STD-04	STD-05
Compatible Models	Displays	HX-32 / QX-32 / RX-32 / TX-32	HX-42 / RX-42 / QX-43 / QX-55 / TX-42 / TX-32P / TX-42P	PD-42 / PD-49 / PD-55 / PN-46 / RX-42E / RX-55E / HX-42E / HX-55E	PN-46D / PN-55D / PN-55H / PS-46 / PS-55
Exterior	Material	Metal	Metal	Metal & Plastic	Metal & Plastic
	Colour	Black	Black	Black	Black
Dimensions	Net (W x H x D)	193.0 x 137.2 x 82.0 mm (7.6" x 5.4" x 3.2") Per Piece	320.0 x 219.7x 118.8 mm (12.5" x 8.7" x 4.7") Per Piece	330.0 x 126.0 x 75.0 mm (13.0" x 5.0" x 3.0") Per Piece	400.0 x 127.0 x 65.0 mm (12.5" x 5.0" x 2.6") Per Piece
	Packing (W x H x D)	230.0 x 206.0 x 103 mm (9.1" x 8.1" x 4.1")	333.0 x 291.0 x 139.0 mm (13.1" x11.5" x 5.5")	398.0 x 244.0 x 124.0 mm (15.7" x 8.8" x 4.9")	446.0 x 221.0 x 177.0 mm (17.6" x 8.7" x 7.0")
Weight	Net Weight	0.6 kg (1.3 lb)	1.3 kg (2.8lb)	1.7 kg (3.7 lb)	2.1 kg (4.6 lb)
	Gross Weight	1.3 kg (2.8 lb)	2.3 kg (5.1 lb)	2.1 kg (4.6 lb)	2.6 kg (5.7 lb)



		STD-06	STD-07	STD-08	STD-09
Compatible Models	Displays	PM-32	PM-43 / PM-48 / PM-55 / QM-43 / QM-55 / QM-43A / QM-55A	PM-65 / PM-65P / QM-65 / QM-65A	RX-32E / HX-32E
Exterior	Material	Metal & Plastic	Metal & Plastic	Metal & Plastic	Metal & Plastic
	Colour	Black	Black	Black	Black
Dimensions	Net (W x H x D)	240.0 x 113.0 x60.0 mm (9.4" x4.4" x2.4") Per Piece 23.1 x 97.8 x64.0 mm (0.9" x4.4" x2.4") Per Piece	330.0 x 126.0 x 75.0 mm (13.0" x 5.0" x 3.0") Per Piece 23.1 x 97.8 x64.0 mm (0.9" x4.4" x2.4") Per Piece	400.0 x 726.0 x65.0 mm (15.7" x28.6" x 2.6") Per Piece	240.0 x 113.0 x60.0 mm (9.4" x4.4" x2.4") Per Piece
	Packing (W x H x D)	290.0 x 90.0 x 93.0 mm (11.4" x 3.5" x 3.7")	398.0 x 244.0 x 124.0 mm (15.7" x 8.8" x 4.9")	776.0 x 321.0 x 155.0 mm (30.6" x 12.6" x 6.1")	290.0 x 90.0 x 93.0 mm (11.4" x 3.5" x 3.7")
Weight	Net Weight	1.5 kg (3.3 lb)	1.9 kg (4.2 lb)	5.0 kg (11.0 lb)	1.3 kg (2.8 lb)
	Gross Weight	1.7 kg (3.7 lb)	2.3 kg (5.1 lb)	6.0 kg (13.2 lb)	1.5 kg (3.3 lb)

Handles



		HDL-01	HDL-02
Compatible Models	Displays	DR-17 / DR-17P / DR-17E	DR-22 / DR-22E / MX-22 / MX-24
Exterior	Material	Metal	Metal
	Colour	White	White
Dimensions	Net (W x H x D)	295.0 x 58.0 x 27.5 mm (11.6" x 2.3" x 1.1")	295.0 x 63.5 x 22.0 mm (11.6" x 2.5" x 0.9")
	Packing (W x H x D)	320.0 x 75.0 x 40.0 mm (12.6" x 3.0" x 1.6")	320.0 x 75.0 x 40.0 mm (12.6" x 3.0" x 1.6")
Weight	Net Weight	0.4 kg (0.8 lb)	0.4 kg (0.8 lb)
	Gross Weight	0.5 kg (0.9 lb)	0.5 kg (0.9 lb)

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

displays.agneovo.com