Unified Communications & Networking Solutions 2025 Product Brochure



distributore ufficiale:



Table of Contents

UC + Networking Convergence

oe i networking convergence	
Router + IP PBX + Next-Gen Firewall + Network Switch or Wi-Fi AP	3
Networking	
Indoor Wi-Fi Access Points	3
Long-Range Weatherproof Wi-Fi Access Points and Routers	4
Network Switches	5
Unified Communications	
IP Voice & Video Phones	6
IP PBX Solutions	10
Business Conferencing, ATAs, Gateways, and Facility Management	11





UC + Networking Convergence



- 3 Models: GCC6010, GCC6010W & GCC6011 Router + IP PBX + Next-Gen Firewall + Network Switch/Wi-Fi Access Point
- IP PBX supports up to 50 users and 12 concurrent calls (with upgrade option)
- VPN Router supports 2.5Gbps (GCC6010 & GCC6011) and 3Gbps (GCC6010W)
- Dual-band Wi-Fi 6 AP (GCC6010W)
- Next-Gen Firewall provides anti-virus, layer 3-7 IDS/IPS, DPI, SSL detection, and more
- 5x Gigabit ports (4 PoE output ports), 2x SFP ports (GCC6010), 5 Gigabit ports (GCC6010W), 10x Gigabit ports (4 PoE output ports), 2x SFP ports (GCC6011).



GCC6020 Series

- 2 models: GCC6020 & GCC6021
- Router + IP PBX + Next-Gen Firewall + Network
- IP PBX supports up to 200 users and 48 concurrent calls
- VPN Router supports 6.5Gbps (GCC6020) and 10Gbps (GCC6021)
- Next-Gen Firewall provides provides anti-virus, layer 3-7 IDS/IPS, DPI, SSL detection,
- 1x 10 Gigabit SFP+ ports , 1x 2.5 Gigabit and 4x Gigabit Ethernet ports (GCC6020)
- 4x 10 Gigabit SFP+ ports, 8x 2.5 Gigabit and 16x Gigabit Ethernet ports (GCC6021)

Networking

Indoor Wi-Fi Access Points



- throughput
 175-meter coverage range
 Supports 384+ devices
- Bluetooth Low Energy (BLE) 5.3



GWN7670

- Dual-band 2×2:2 MU-MIMO Wi-Fi 7 3.6Gbps wireless

- 175-meter coverage range Supports 256 devices
- Bluetooth Low Energy



GWN7670WM

- Dual-band 2×2:2 MU-MIMO Wi-Fi 7 3.6Gbps wireless

- 175-meter coverage rangeSupports 384+ devices
- Bluetooth Low Energy



GWN7665

- Tri-band 2×2:2 MU-MIMO
- Wi-Fi 6E 5.4Gbps wireless
- throughput
- 175-meter coverage range Supports 384+ devices
- Bluetooth Low Energy



GWN7664E

- Dual-band 4x4:4 MU-MIMO
- 6Gbps wireless throughput175-meter coverage rangeSupports 512 devices



- Dual-band 2×2:2 2.4GHz and 4×4:4 5GHz MU-MIMO Wi-Fi 28:6h
- 5.38Gbps wireless
- 175-meter coverage range
- Supports up to 256 devices



GWN7661E

- In-Wall Access Point
- Dual-band 2×2:2 MU-MIMO Wi-Fi 6
- 1.77Gbps wireless
- throughput
 100-meter coverage range
- Supports up to 500 devices



GWN7660E

- Dual-band 2×2:2 2.4GHz and 4×4:4 5GHz MU-MIMO Wi-Fi 6
- 3 Gbps wireless
- throughput
 175-meter coverage range
- Supports up to 256 devices



GWN7630

- Dual-band 4×4:4 MU-MIMO
- Wi-Fi 5
 2.33Gbps wireless throughput
- 175-meter coverage range
- Supports up to 200 devices



GWN7625

- Dual-band 2×2:2 2.4GHz and 4×4:4 5GHz MU-MIMO Wi-Fi 5
 2.03Gbps wireless

- 165-meter coverage rangeSupports up to 200 devices






Long-Range Weatherproof Wi-Fi Access Points



Wi-Fi and Wired Routers

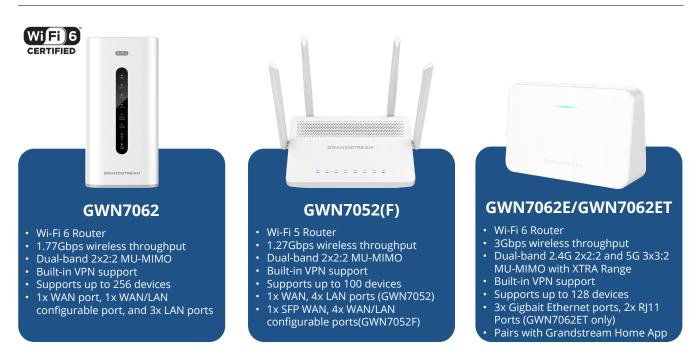









Network Switches





- 8 /24 Gigabit Ethernet ports and 2/4 Gigabit SFP+ ports
- Smart power control to support dynamic PoE/PoE+
- Supports deployment in IPv6 and IPv4 networks



- GWN7811(P), GWN7812P, GWN7813P, GWN7816(P)
 8/16/24/48 Gigabit Ethernet ports and 2/4/6/10 Gigabit SFP+
- Smart power control to support dynamic PoE/PoE+ power allocation
- Supports deployment in IPv6 and IPv4 networks



Layer 2+

- GWN7801(P), GWN7802(P), GWN7803(P), GWN7806(P) 8/16/24/48 Gigabit Ethernet ports and 2/4/6 Gigabit SFP+ ports
- Smart power control to support dynamic PoE/PoE+ power allocation
- Supports deployment in IPv6 and IPv4 networks



- GWN7721(P), GWN7711(P), GWN7710R
- GWN7721(P), GWN7711(P), GWN7710R
 GWN7721(P): 8 2.5G ports, 2 10G SFP+ ports, 8 port PoE/PoE+ outut (GWN7721P)
 GWN7711(P): 8 Gigabit ports, 4 port PoE/ GWN7711(P)
- PoE+ output (GWN7711P)
 GWN7710R: IP66-rated waterproof and
- dustproof, 5 Gigabit ports, 4 PoE/PoE+/ PoE++ output, 1 PoE input
- Smart power control to support dynamic PoE power allocation (GWN7721P, GWN7711P, and GWN7710R)
- Supports deployment in IPv6 and IPv4 networks



Unmanaged

- GWN7700(P), GWN7701(P/PA),
- GWN7702(P), GWN7703, GWN7706 5/8/16/24/48 Gigabit ports, 4 port PoE+ output (GWN7700P & GWN7701P), 8 port PoE+ output (GWN7701PA & GWN7702P)
- 802.3 af/at compliant up to 30W on each port, (GWN7700P/GWN7701P, GWN-7701PA/GWN7702P only)



Unmanaged 2.5G Multi-Gigabit

- GWN7700M, GWN7700MP, GWN7701M
- 5 and 8 Multi-Gigabit Copper Ports provide 100/1000/2500Mbps connectivity
- 1 SFP+ Port with 1 Gigabit or 10-Gigabit connectivity



Unified Communications - IP Voice & Video Phones

GRP Series Carrier-Grade IP Phones



GRP2601(P/W)

- 2 SIP accounts, 2 lines
- GRP2601P includes built-in PoE
- GRP2601W includes 2.4 GHz Wi-Fi support
- Swappable faceplates



GRP2602(P/W/G)

- 4 SIP accounts, 2 lines
- GRP2602P (10/100 Mbps) & GRP2602G (10/100/1000 Mbps) includes built-in PoE
- GRP2602W includes built-in dual-band Wi-Fi support
- Swappable faceplates



GRP2603(P)

- 6 SIP accounts, 3 linesGRP2603P includes built-in
- PoF
- Swappable faceplates



GRP2604(P)

- 6 SIP accounts, 3 lines
- GRP2604P includes built-in PoE
- Swappable faceplates



GRP2610(P)

- 2 SIP accounts, 2 linesBuilt in PoE on GRP2610P
- Swappable faceplates



GRP2611G

- 3 SIP accounts, 3 lines
- Dual switched auto-sensing 10/100/1000 Mbps Gigabit ethernet ports with integrated
- Swappable faceplates



GRP2612(P/W/G)

- 4 SIP accounts, 4 lines
- Built in PoE on GRP2612, GRP2612P, GRP2612W (10/100 Mbps) & GRP2612G (10/100/1000 Mbps)
- GRP2612W includes built-in dual-band Wi-Fi support
- Swappable faceplates



GRP2613(W)

- 4 SIP accounts(GRP2613), 6 SIP accounts (GRP2313W), 6 lines
- Includes built in 10/100/1000 Mbps Gigabit ethernet ports
- Swappable faceplates
- GRP2613W includes built in dual-band Wi-Fi 6 support and Bluetooth ®



GRP2614

- 4 SIP accounts, 4 lines
- Includes built in 10/100/1000 Mbps Gigabit ethernet ports
- Swappable faceplates



GRP2615

- 5 SIP accounts, 10 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE Swappable faceplates Compatible with GBX20 Extension Module



GRP2616

- 6 SIP accounts, 6 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE
- Swappable faceplates



GRP2624

- 6 SIP accounts, 8 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE
- Swappable faceplates
- Compatible with GBX20 **Extension Module**



GRP2634

- 6 SIP accounts, 8 lines
- 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE • Swappable faceplates





GRP2636

- 6 SIP accounts, 12 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE
- Swappable faceplates



GRP2650

- 6 SIP accounts, 14 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE
- Swappable faceplates
- Compatible with GBX20 **Extension Module**



GRP2670

- 6 SIP accounts, 12 lines
- Integrated dual-band Wi-Fi 802.11ac (2.4Ghz & 5Ghz)
- Includes built-in PoE
- Swappable faceplates
- Compatible with GBX20 **Extension Module**





GXP1610(P)/GXP1615

- 1 SIP account, 2 lines
- Dual-switched 10/100 Mbps ports, integrated PoE (GXP1610P/PGXP1615 only)
- 3-way audio conferencing



GXP1620/GXP1625

- 2 SIP accounts, 2 lines
- Dual-switched 10/100 Mbps ports, integrated PoE on GXP1625
- 3-way audio conferencing



GXP1628

- 2 SIP accounts, 2 lines Dual-switched 10/100/1000
- Mbps ports, integrated PoE 3-way audio conferencing



GXP1630

- 3 SIP accounts, 3 lines
- Dual-switched 10/100/1000 Mbps ports, integrated PoE
- 3-way audio conferencing



GXP2130 v2

- 3 SIP accounts, 3 lines Dual-switched 10/100/1000 Mbps ports, integrated PoE 3-way audio
- conferencing Integrated Bluetooth ®



GXP2135

- 4 SIP accounts, 8 lines
- Dual-switched 10/100/1000 Mbps ports, integrated PoE
- 4-way audio conferencing
- Integrated Bluetooth ®



GXP2140

- 4 SIP accounts, 4 lines
- Dual-switched 10/100/1000 Mbps ports, integrated PoE
- 5-way audio conferencing

Module

Integrated Bluetooth ® Compatible with GXP2200 Extension



GXP2160

- 6 SIP accounts, 6 lines
- Dual-switched 10/100/1000 mbps ports, integratMd PoE
 5-way audio
- conferencing
- Integrated Bluetooth ®



GXP2170

- 6 SIP accounts, 12 lines
- Dual-switched 10/100/1000 Mbps ports, integratd PoE 5-way audio
- conferencing Integrated Bluetooth ®
- Compatible with **GXP2200 Extension** Module

Extension Modules



GXP2200 EXT

- 128x384 backlit LCD display
- 20 per page (each module contains 2 pages, for up to 40 lines per module)
- Connect 4 modules for up to 160 contacts/extensions



GBX20

- 4.3 inch (272x480) color LCD 20 per page (each module
- contains 2 pages, for up to 40 lines per module)
- Connect 4 modules for up to 160 contacts/extensions







Hotel IP Phones





Wi-Fi Cordless IP Phones



WP810

- Wi-Fi Cordless IP Phone
- 2 SIP accounts, 2 lines
- Dual-band Wi-Fi 5
- Rechargeable battery, 6 hour talk time, 120-hour standby



WP816

- Wi-Fi Cordless IP Phone
- 2 SIP accounts, 2 lines
- Dual-band Wi-Fi 6
- Rechargeable battery, 6 hour talk time, 120-hour standby



WP820

- Wi-Fi Cordless IP Phone
- 2 SIP accounts, 2 lines
- Dual-band Wi-Fi 5
- Rechargeable battery, 7.5 hour talk time, 150-hour standby



WP822

- Wi-Fi Cordless IP Phone
- 2 SIP accounts, 2 lines
- Dual-band Wi-Fi 5
- Rechargeable battery, 8 hour talk time, 200-hour standby



WP825

- Wi-Fi Cordless IP Phone
- 2 SIP accounts, 2 lines
- Dual-band Wi-Fi 5
- Rechargeable battery, 8 hour talk time, 200-hour standby
- Waterproof, drop safe 2.5m



WP826

- · Wi-Fi Cordless IP Phone
- 3 SIP accounts, 3 lines
- Dual-band Wi-Fi 6
- Rechargeable battery, 12 hour talk time, 240-hour standby



WP836

- Ruggedized Wi-Fi Cordless IP Phone 3 SIP accounts, 3 lines
- Dual-band Wi-Fi 6
- Rechargeable battery, 10 hour talk time, 240-hour standby
- Waterproof, drop safe 2m



WP856

- Wi-Fi Smartphone
 Runs on Android™
- 6 SIP accounts, 6 lines Dual-band Wi-Fi 6
- 1D and 2D barcodes scanner
- Rechargeable battery, 20 hour talk time, 200-hour standby
- Waterproof, drop safe 1.5m

DECT Cordless IP Phones



DP720/DP722/DP730

- DECT Handsets
- 10 SIP accounts, 10 lines
- Supports range of up to 400m outdoors & 50m indoors



DP725

- **DECT Cordless Handset**
- 20 SIP accounts, 20 lines
- Supports range of up to 400m outdoors and 50m indoors
- Up to 56-hour talk time



DP735

- Ruggedized DECT Cordless HD Handset
- 20 SIP accounts, 20 lines
- Supports range of up to 400m outdoors and 50m indoors
- Up to 65-hour talk time
- Waterproof, dustproof, drop safe from 2.5m



DP750/DP752/DP755

- **DECT Base Stations**
- 20 SIP accounts, 20 lines (DP755)
- 10 SIP aacounts, 10 lines (DP750/DP752)
- Pairs with up to 10 handsets



DP760

- DECT Repeater
- 2 concurrent HD calls Extends range 300m outdoors & 50m indoors
- Automatic or manual association to DP750/DP752



Unified Communications - IP PBX Solutions



UCM6300 & UCM6300A Series IP PBX

- UCM6300 Series: Supports up to 3000 users and 450 concurrent calls
- UCM6300A: Audio-only, supports up to 1500 users and 200 concurrent calls
- Automated NAT traversal with UCM RemoteConnect
- Compatible with the Wave App
- Compatible with GDMS for cloud management



CloudUCM

- Cloud PBX solution that supports up to 200 users and 64 concurrent calls
- Built-in Session Border Controller (SBC)
- Hosted on AWS
- Compatible with the Wave App, GDMS, and UCMRC
- Visit cloud.grandstream.com/clouducm for more and to sign up



SoftwareUCM

- Software PBX solution that supports 50-5000 users and up to 1000 concurrent calls
- Built-in audio, video, chat, and web meeting platform
- Compatible with the Wave App, GDMS, and UCMRC



UCM RemoteConnect (UCMRC)

- Cloud based NAT firewall traversal powered by AWS
- Integrated with GDMS
- Offers secure connections with remote users and SIP endpoints using Grandstream's PBX platforms and solutions



Wave

- Communication and collaboration app for desktop, web and mobile
- Provides private and group chat, audio and video meetings/conferences, file sharing, and more
- Supports video resolutions up to 1080p HD
- Compatible with all of Grandstream's PBX platforms and solutions



Unified Communications - Business Conferencing



GVC3210

- Runs on Android 6.0 Built-in Bluetooth® and integrated Wi-Fi
- Integrated 1x HDMI in, 2x HDMl out, and 2x USB

GVC3220

- Runs on Android 9.0 Integrated dual-band Wi-Fi
- 802.11ac 1x HDMI In, 2x HDMI
- Pairs with GMD1208



GAC2500

- · Runs on Android 4.4
- · 6 SIP accounts, 6 lines,
- 7-way voice conferencing Integrated Wi-Fi and PoE



GAC2570

- Integrated Wi-Fi 6
- 12-party conferences 12 omnidirectional
- microphones with MMAD Pairs with GMD1208



GMD1208

- · Extension microphone
- companion device Built-in 8 omni-directional MEMS with 5-meter pickup
- 1500mA built-in Li-Ion
- battery Bluetooth® v2.1+EDR

ATAs & Gateways



HT812 v2 - HT814 v2 HT818 v2

- Supports 2 SIP profiles and 2/4/8 FXS ports
- High performance NAT
- Strong AES encryption with security certificate per unit



HT813

- Supports 2 SIP profiles through 1 FXS & 1 FXO port2x 100Mbps LAN/WAN
- Strong AES encryption with security certificate per unit



HT801 v2 - HT802 v2

- Supports 1/2 SIP profiles through 1/2 FXS ports and a single 10/100Mbps port Failover SIP server
- TLS and SRTP security encryption technology



HT841/HT881

- Supports 3 SIP profiles through 1 FXS port and 4/8 FXO ports
- High-performance NAT router Strong AES en-cryption with security certificate per unit



GXW4200 Series v2

- GXW4248 includes 2 50-pin Telco connectors
- 1 Gigabit network port 4 SIP server profiles per

system

Facility Access Systems



GDS3702 - GDS3705

- · HD audio with 1.5m of audio input and 3m of audio output
- Built-in RFID chip reader (GDS3705)
- Supports SIP calls to IP phones to facilitate communication Integrated PoE



GDS3710

- Video resolutions up to 1080p
- Built-in RFID chip reader
- Built-in hemispheric camera Supports motion detection
- Integrated PoE
- ONVIF Profile S compliant



GDS3712

- Video resolutions up to 1080p
- Built-in hemispheric camera
- Supports motion detection
- Integrated PoE
- **ONVIF Profile S compliant**



GDS3720 Series

- 3 Models: GDS3725, GDS3726, GDS3727
- 2K Ultra HD Camera
- Al-based behavior analysis
- Integrated PoE
- ONVIF Profile S compliant
- Pairs with the SecureAccess App

Intercoms & PA



- 1-way SIP Speaker
- SIP paging, multicast paging, call-waiting
 Integrated Wi-Fi &
- Bluetooth ® One 10/100Mbps network port with PoE/ PoE+



GSC3506 v2

- · Multicast Paging Speaker
- SIP paging, multicast paging, call-waiting One 10/100Mbps network
- port with PoE/ PoE+ 1x 3-pin differential line
- 1x 2-pin switch-in input port, 1x Alarm-in input port, 1x DC24V, 1x network and 1x USB port



GSC3510

- SIP Intercom Speaker & Mic · Full-duplex speakerphone
- with HD acoustic chamber advanced acoustic echo
- cancellation 3 directional mics
- Integrated Wi-Fi and Bluetooth ®
- One 10/100Mbps network port with PoE/ PoE+
- 2-pin multi-purpose input



GSC3516

- Multicast Talk-Back Speake Full-duplex speakerphone with HD acoustic chamber, advanced acoustic echo
- cancellation
- omnidirectional mic Integrated Wi-Fi and Blue-
- One 10/100Mbps network port with PoE/ PoE+
- 2-pin multi-purpose input



GSC3570, GS3574, **GSC3575**

- Intercom & Facility Control
- GSC3574/GSC3575: Android v13, 7-inch touch screen, Wi-Fi 6, Bluetooth 5.0, 8x alarm input, 2x alarm output
- GSC3570: 7-inch touch screen, Wi-Fi, 4 alarm input





CONNECTING THE WORLD

www.grandstream.com



distributore ufficiale:

ELECTRANIC'STIME

Più competenza, più soluzioni.



© 2025 Grandstream Networks, Inc - All rights reserved